


Product Information

LRC 3-Relay Relay box to control all functions and the solenoid valve

Additional Product For „LRC3 Overfill Prevention”

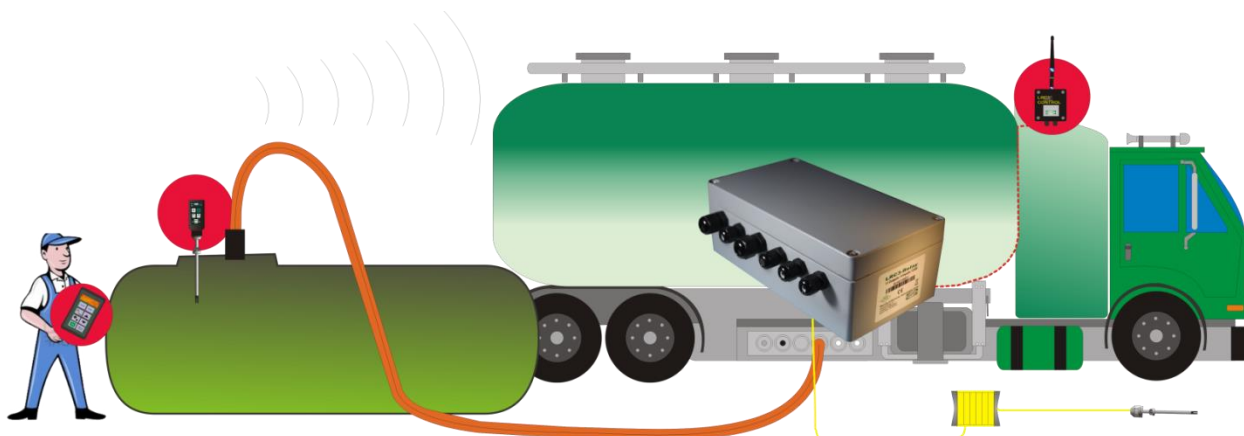

Features and Applications:

8 fixed remote control functions

- **START- STOP- engine speed**
- **F1- (z.B. Jack shaft)**
- **F2- (z.B. Working light right side)**
- **F3- (z.B. Hose roll in)**
- **F4- (z.B. Hose roll out)**

+ 2 other optional functions

- **OUT1**
- **OUT2**



In combination with the Radio Control Remote Unit all activ applications will be shown on the display

- **Solenoid valve output**
- **4 inputs**
- **Cable AS (overfill prevention) pin**
- **CAN Bus port**
- **Radio-Display equipollent to LRC3 Control.**
- **Adjust- Input (via Relay box)**
-

The relay box is connected via CAN Bus to the "LRC3 Control".

All control functions and visual displays of the LRC3 Control will be adopted from the LRC-3 Relay automatically.

For detail information and installation program please contact our technical engineers : hh@secu-tech.at or ms@secu-tech.at